

# Iwasaki Intermittent Offset printing machine TR3



## Features

- Better ink flow
- Quick response for ink adjustment
- Stable print quality by improved rigidity of machine frame
- Quick adjustment of position for less wastage and quick set up



MARKETED & SERVICED BY


**VINSAK**

[WWW.VINSAK.COM](http://WWW.VINSAK.COM)

# Options

- Tablet operation will be available
- LED UV available
- Remote maintenance (no special software)
- Automatic registration system in near future

# Machine Layout

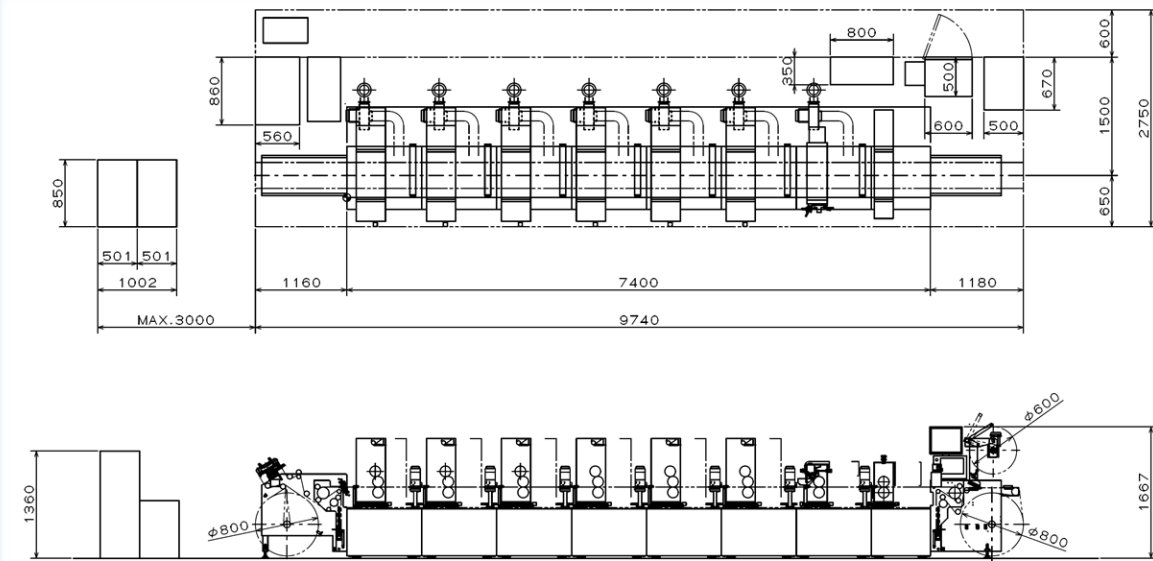

# After Press

- Various after press are available  
(Rotary die cut unit, Flexo unit for vanish, Hot foil, Emboss, Flat bed die cut etc.)

## Specification

Machine length	9740mm (Unwinder+6color+Vanish+Rotary die cut +Rewinder)
Paper width	330mm
Material diameter	Φ800mm
Max printing area	310×320mm
Feeding amount	50mm-325mm
Max Speed	250rpm
Rewinder diameter	φ800mm
Plate cylinder	φ136mm
UV power	5.6kW

Paper feeding motor speed is based on technical capabilities of the machine. Actual speed will be effected by factors such as printing length, material types etc.

Feel free to contact us ! [inter@itk-iii.co.jp](mailto:inter@itk-iii.co.jp)



5-6-14, Mizuhai, Higashi-Osaka Osaka Japan  
TEL:+81-72-964-7844 FAX:+81-72-964-2859